


寸法			タップ数	断面積	許容電流
T (板厚)	W (幅)	L (長さ)			
8	15	125	5	120	200
		250	10		
		375	15		
		500	20		
		625	25		
		750	30		
		875	35		
		1,000	40		
		1,125	45		
		1,250	50		
		1,375	55		
		1,500	60		
8	20	125	5	160	250
		250	10		
		375	15		
		500	20		
		625	25		
		750	30		
		875	35		
		1,000	40		
		1,125	45		
		1,250	50		
		1,375	55		
		1,500	60		
8	25	125	5	200	350
		250	10		
		375	15		
		500	20		
		625	25		
		750	30		
		875	35		
		1,000	40		
		1,125	45		
		1,250	50		
		1,375	55		
		1,500	60		

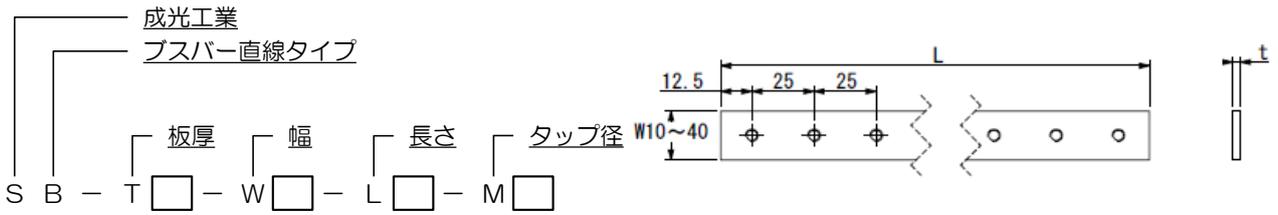

寸法			タップ数	断面積	許容電流
T (板厚)	W (幅)	L (長さ)			
8	30	125	5	240	350
		250	10		
		375	15		
		500	20		
		625	25		
		750	30		
		875	35		
		1,000	40		
		1,125	45		
		1,250	50		
		1,375	55		
		1,500	60		
8	40	125	5	320	400
		250	10		
		375	15		
		500	20		
		625	25		
		750	30		
		875	35		
		1,000	40		
		1,125	45		
		1,250	50		
		1,375	55		
		1,500	60		


SB 直線タイプ メッキ処理なし

T8

成光工業
フスパー直線タイプ

S B - T - W - L - M

板厚 幅 長さ タップ径

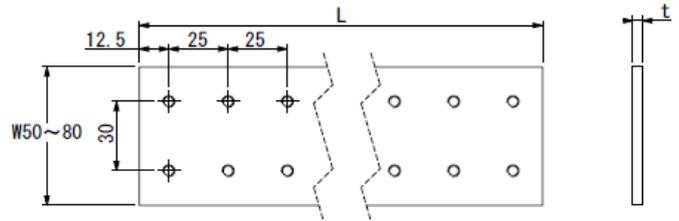


寸法			タップ数	断面積	許容電流
T (板厚)	W (幅)	L (長さ)			
8	50	125	10	400	450
		250	20		
		375	30		
		500	40		
		625	50		
		750	60		
		875	70		
		1,000	80		
		1,125	90		
		1,250	100		
		1,375	110		
		1,500	120		
8	60	125	10	480	550
		250	20		
		375	30		
		500	40		
		625	50		
		750	60		
		875	70		
		1,000	80		
		1,125	90		
		1,250	100		
		1,375	110		
		1,500	120		
8	75	125	10	600	700
		250	20		
		375	30		
		500	40		
		625	50		
		750	60		
		875	70		
		1,000	80		
		1,125	90		
		1,250	100		
		1,375	110		
		1,500	120		

成光工業
フスパー直線タイプ

S B - T - W - L - M

板厚 幅 長さ タップ径

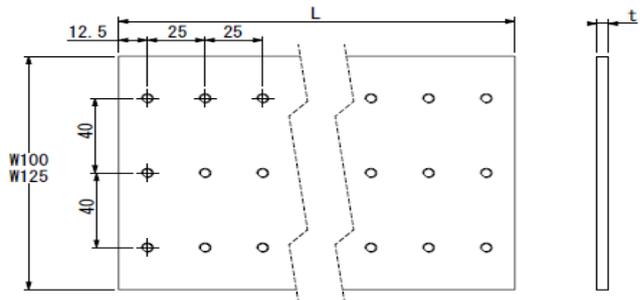


寸法			タップ数	断面積	許容電流
T (板厚)	W (幅)	L (長さ)			
8	100	125	15	800	950
		250	30		
		375	45		
		500	60		
		625	75		
		750	90		
		875	105		
		1,000	120		
		1,125	135		
		1,250	150		
		1,375	165		
		1,500	180		
8	125	250	30	1000	1200
		375	45		
		500	60		
		625	75		
		750	90		
		875	105		
		1,000	120		
		1,125	135		
		1,250	150		
		1,375	165		
		1,500	180		

成光工業
ブスバー直線タイプ

S B - T - W - L - M

板厚 幅 長さ タップ径

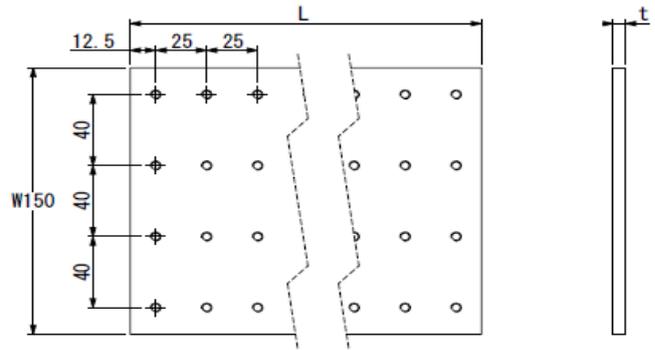


寸法			タップ数	断面積	許容電流
T (板厚)	W (幅)	L (長さ)			
8	150	250	40	1200	1400
		375	60		
		500	80		
		625	100		
		750	120		
		875	140		
		1,000	160		
		1,125	180		
		1,250	200		
		1,375	220		
		1,500	240		

成光工業
ブスバー直線タイプ

S B - T - W - L - M

板厚 幅 長さ タップ径

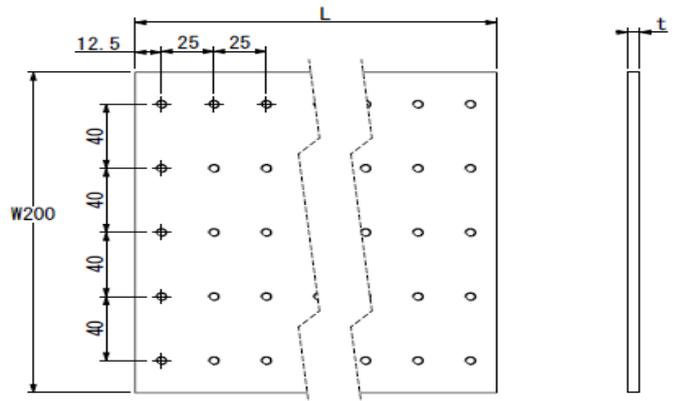

寸法			タップ数	断面積	許容電流
T (板厚)	W (幅)	L (長さ)			
8	200	250	50	1600	1900
		375	75		
		500	100		
		625	125		
		750	150		
		875	175		
		1,000	200		
		1,125	225		
		1,250	250		
		1,375	275		
		1,500	300		